

4" Coaxial Ceiling Speaker (20W/10W/5W/2.5W&8Ω)

CSP5PP

Feature:


- ✓ Commercial public address system ceiling speaker with transformer.
- ✓ Hi-fi range coaxial ceiling loudspeaker with ABS cover.
- ✓ Ideal for school, restaurant, hotel, train station & airport BGM and speech use.
- ✓ Rated power output 20W/10W/5W/2.5W&8Ω at 100V and 8ohms
- ✓ 4" coaxial PP driver unit with 1" tweeter
- ✓ Line input 100V or 70V & 8 Ω .
- ✓ Flush mount in-ceiling quick and secure installation.
- ✓ Wide dispersion rang installation PA loudspeaker.



Specification:

Model	CSP5PP
Description	4" Coaxial Ceiling Speaker
Rated Power Output	20W/10W/5W/2.5W&8Ω
Line Input	100V or 70V & 8 Ω
Frequency Response	115Hz-11.6KHz
SPL(@1W/m)	86±3dB
Speaker Unit	4" coaxial PP driver with 1" tweeter
Cutout Size	180mm
Dimension	Φ213x160mm
Material	ABS enclosure, metal grille and ABS cover in white
Mounting Way	Flush mount in-ceiling quick and secure installation
Weight	1.66kg

Side View & Dimension:

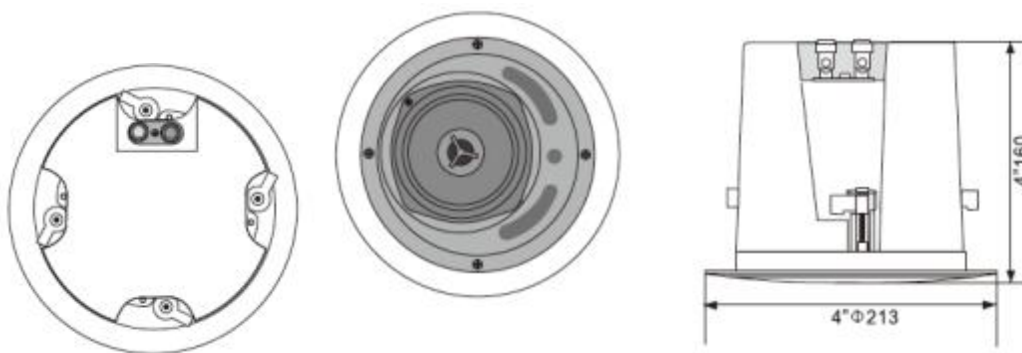

SPL VS Angle & SPL VS Frequency Diagrams:

