


Point P6 Speaker

the cabinet's bass reflex vent to create a distinctive cardioid low-frequency dispersion characteristic.

It delivers delicate high-frequency detail, rich vocal reproduction and solid low-end response, perfectly suited for speech reinforcement scenarios.

This model is the top choice for conference rooms, dining bars and compact livehouse venues.

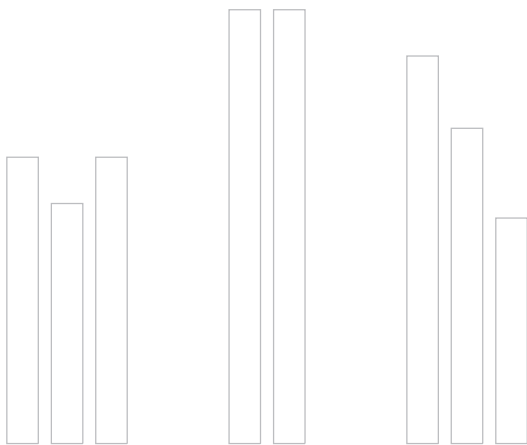

Point P6 Speaker

◆All components are designed according to IP46 international dustproof and waterproof grade standards, and special flow guiding and anti splash devices are designed on the cabinet structure.

◆The portable line array sustem can be used for hanging sound as a professional sound reinforcement for hanging and standing alone on the ground. Therefore, we only need to select the appropriate number and the ultra low ground to form a sound reinforcement system with wide directivity, long projection distance, high sound pressure and good hearing.

◆Widely used in theaters, multi-purpose halls, churches, schools, large and medium_sized_sports_fields, large and medium-sized indoor and outdoor performances, language reinforcement, etc.

	Point P6				
		Point P6 Ferrite driver	Point P6 Ferrite driver	Point P6 Ferrite driver	

Point P6 Speaker

Point P6 TECHNICAL SPECIFICATION



MODEL	Point P6
System	6.5-WAY FULL RANGE
Frequency response	85Hz-20KHz
Driver	LF:6.5"X1,HF:1.38"X1
Rated Impedance	8Ω
Sensitivity	95dB
Rated power	180W
Peak power	360W
Continuous/Maximum SPL	119/122dB
Net Weight	25.9KG
Product size	720x415x262mm

Point P6 FEATURES



Can be connected to an ohmic connector or a wiring terminal.



Support methods.



U-shaped frame.

Point P6 TECH DRAWING

