

# A.LEDA B-EYE K10 CC

**I** DIAGRAMMI FOTOMETRICI

**D** FOTOMETRICHE DIAGRAMME

**GB** PHOTOMETRIC DIAGRAMS

**E** DIAGRAMOS FOTOMÉTRICOS

**F** DIAGRAMMES PHOTOMETRIQUES

**Legenda** Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

**Key** Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

**Légende** Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

**Legende** Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.


**Leyenda** Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.

## Minimum Zoom (6.7° 10% - 4.6° 50%)

### Total Output:

1190 lumens (White)  
410 lumens (Red)  
920 lumens (Green)  
110 lumens (Blue)  
2170 lumens (RGBW)

<b>White</b>	lux (fc)	0	22983 (2135)	8274 (769)	2069 (192)	919 (85.4)
<b>Red</b>	lux (fc)	0	7908 (735)	2847 (264)	712 (66.1)	316 (29.4)
<b>Green</b>	lux (fc)	0	17642 (1639)	6351 (590)	1588 (148)	706 (65.6)
<b>Blue</b>	lux (fc)	0	2083 (194)	750 (69.7)	188 (17.4)	83 (7.74)
<b>RGBW</b>	lux (fc)	0	41669 (3871)	15001 (1394)	3750 (348)	1667 (155)

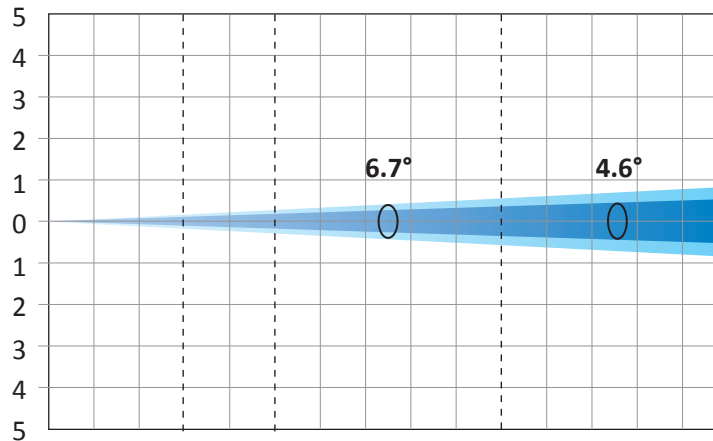


<b>Distance</b>	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
<b>Diameter 10%</b>	m (ft in)	0	0.35 (1' 2")	0.59 (1' 11")	1.17 (3' 10")	1.76 (5' 9")
<b>Diameter 50%</b>	m (ft in)	0	0.24 (0' 9")	0.40 (1' 4")	0.80 (2' 8")	1.20 (3' 11")

## Maximum Zoom (53.9° 10% - 41° 50%)

### Total Output:

2520 lumens (White)  
840 lumens (Red)  
1880 lumens (Green)  
230 lumens (Blue)  
4570 lumens (RGBW)

<b>White</b>	lux (fc)	0	577 (53.6)	208 (19.3)	52 (4.82)	23 (2.14)
<b>Red</b>	lux (fc)	0	191 (17.7)	69 (6.39)	17 (1.6)	8 (0.71)
<b>Green</b>	lux (fc)	0	466 (43.3)	168 (15.6)	42 (3.9)	19 (1.73)
<b>Blue</b>	lux (fc)	0	57 (5.3)	21 (1.91)	5 (0.48)	2 (0.21)
<b>RGBW</b>	lux (fc)	0	1067 (99.1)	384 (35.7)	96 (8.92)	43 (3.96)

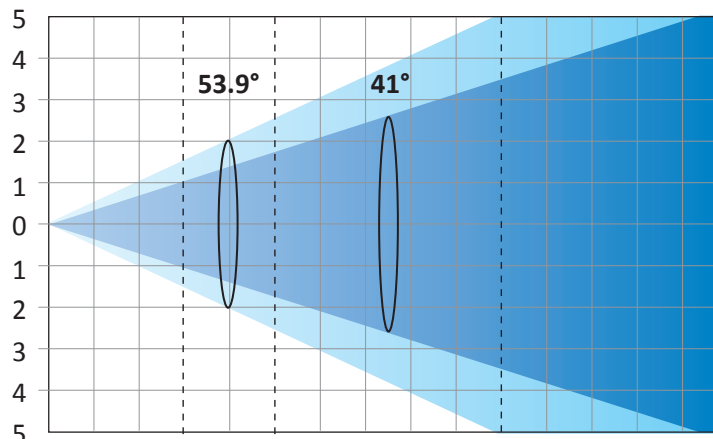


<b>Distance</b>	m (ft in)	0	3 (9' 10")	5 (16' 5")	10 (32' 10")	15 (49' 3")
<b>Diameter 10%</b>	m (ft in)	0	3.05 (10' 0")	5.08 (16' 8")	10.17 (33' 4")	15.25 (50' 1")
<b>Diameter 50%</b>	m (ft in)	0	2.24 (7' 4")	3.74 (12' 3")	7.48 (24' 6")	11.22 (36' 10")

# A.LEDA B-EYE K10 CC


- I DIAGRAMMI FOTOMETRICI
- GB PHOTOMETRIC DIAGRAMMS
- F DIAGRAMMES PHOTOMETRIQUES

- D FOTOMETRICHE DIAGRAMME
- E DIAGRAMOS FOTOMÉTRICOS

**A.leda B-EYE K10 CC Illuminance Distribution**  
Minimum Zoom - distance = 5m

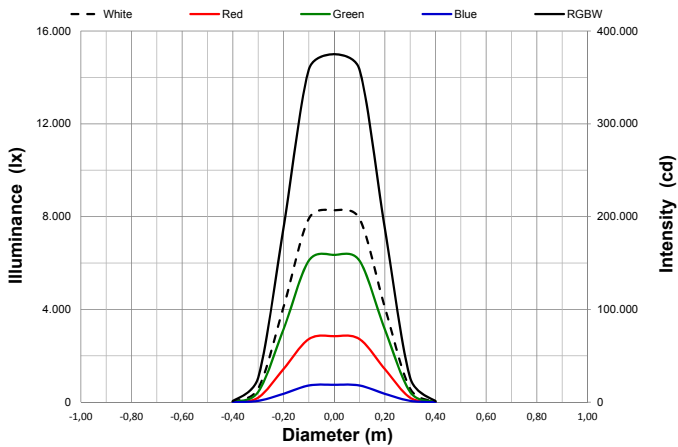

**A.leda B-EYE K10 CC Illuminance Distribution**  
Maximum Zoom - distance = 5m

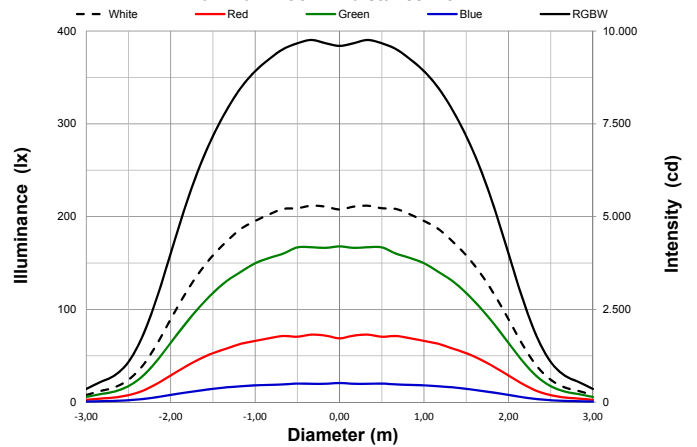

**A.leda B-EYE K10 CC Illuminance Distribution**  
MIN Zoom vs MAX Zoom - distance = 5m

